

Giunti di dilatazione

Expansion joints

Dehnungsfugenprofile
Joints de dilatation

Juntas de dilatacion
Профили для температурных швов




CERAMICA
Tile



Mobicer, Ecocer, Duolastic:

metodo di posa

Method of assembly
Méthode de pose
Verlegungsmethoden
Método de colocación
Особ прокладки

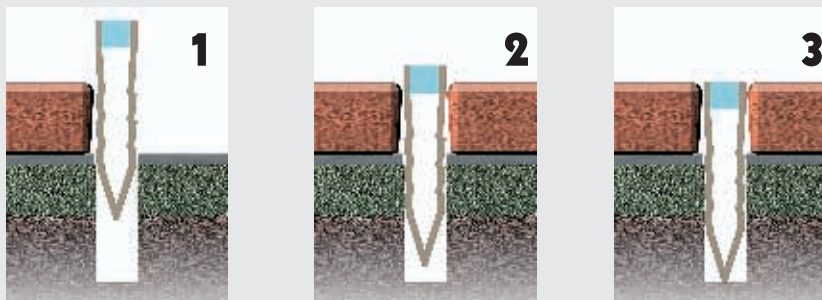

ART./COLOUR CODE/COLOUR	L (m) L (m)	Q.TÀxCONF. Q.TYxPACK	CARATTERISTICHE CHARACTERISTICS	MATERIALE - COLORI MATERIAL - COLOUR
----------------------------	----------------	-------------------------	------------------------------------	---



Ecocer




270A	2,00	100mt	ok	03
------	------	-------	----	----

PVC Opaco
PVC mat colour
PVC couleur mate
PVC matte Farbe
PVC color mate
ПВХ матовый



Mobicer

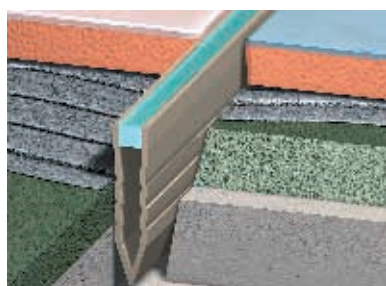

H=25	260	2,50	100mt	ok	03	S	T
	260A	2,50	100mt	ok	03	S	03
H=35	260D	2,50	100mt	ok	03	S	T
	260E	2,50	100mt	ok	03	S	03
H=45	260L	2,50	100mt	03	S	T	
	260M	2,50	100mt	03	S	03	



Duolastic

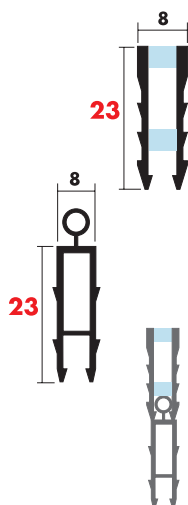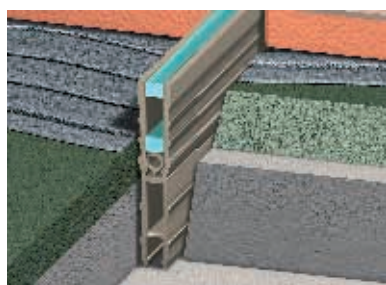

	270D	2,50	100mt	S	T
	270F	2,50	100mt	S	03
	270M	2,50	100mt	03	
	270D1	2,50	100mt	S	T
	270D2	2,50	100mt	S	03

PVC
ПВХ

