

D

## folocopri™ CP

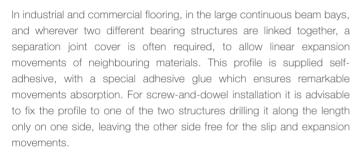

This profile is also suitable for bumper guards for stretchers in hospitals or as wall protection in schools and offices.

Illustrated scale dimension 1:1



## FOLOCOPRI CP 80 AS\* Silver Anodised Aluminium

Anodised aluminium profile, silver finish with an. approx. 20 micron coating. Good resistance against oxidation and mechanical impacts.

Material: Extruded Anodised Aluminium

Length: 2,70 meters

## FOLOCOPRI CP-IL\* Polished Stainless Steel

Stainless Steel polished profile, 1,2 mm thickness. Polished surface covered by a protective film. Good resistance to atmospheric agents and high mechanical resistance.

Material: Polished Stainless Steel

Length: 2,70 meters

Surface covered with protective film strip

## FOLOCOPRI CP-OL\* Polished Brass

A laminated brass profile, 1,2 mm thickness with a polished surface protected by a plastic film. It ensures a high tolerance to mechanical impact and diluted chemical agents.

Material: Laminated Polished Brass

Length: 2,70 meters

Surface covered with protective film strip



B=mm	Finish	A	۸rt.	
80	Aluminium Silver Self-Adhesive	CP	80	ASA
80	Aluminium Silver	CP	80	ASN

Art.

CP 100 OLN

Finish

B=mm

60	ILA
60	ILN
80	ILA
80	LN
100	LΑ
100	ILN
Art.	
	OLA
60	OLA OLN
60	
60 60 80	OLN
	60 80 80



Polished Brass