

Controllable louvre

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (2.3 x 2.3 mm) or insect screen (6 x 6 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions


- Blade pitch: 33,3 mm
- Frame thickness: 24, 28 or 32 mm
- Minimum dimensions: 130x130 mm
- Specify on ordering: width x height in mm (overall dimensions)
- Controllable in combination with 100, 130 and 150 mm hit-and-miss ventilators or with insulated aluminium door (414/D) (max size 800 x 800 mm H)

Fixing

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

Control options (1 controlpanel per module)


- Knob control (standard)
- Rod
- Cord
- Motor



414VA



414/D

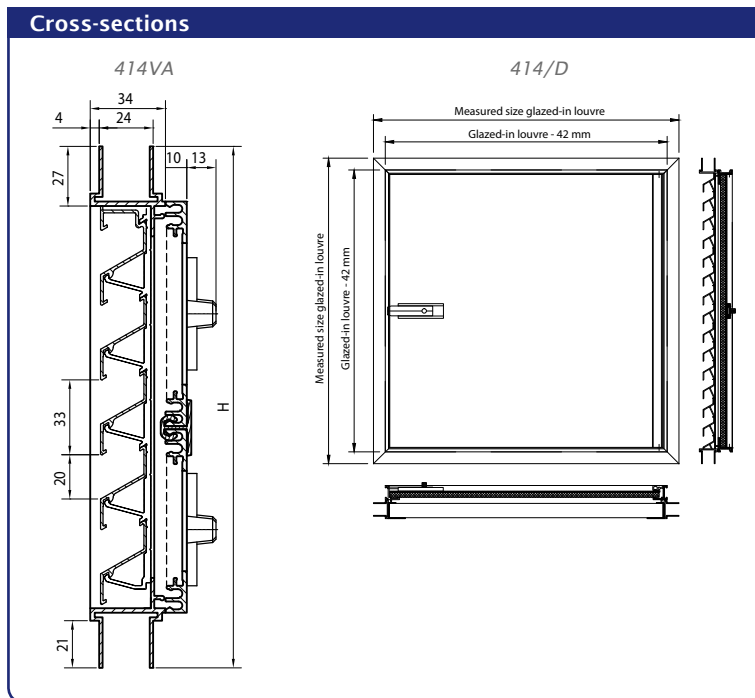

Technical specifications	
	414VA
Airflow	(EN 13030)
K-factor (supply)	28,13
C _e coefficient	0,189
<i>(For combination with 130 and 150 mm vents)</i>	

