

*Glazed-in louvre with chevron section blades, pitch 20*

**Material**

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (6 x 6 mm) or insect screen (2.3 x 2.3 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

**Dimensions**

- Blade pitch: 20 mm
- Frame thickness: 24, 28 or 32 mm
- Minimum dimensions: 130 x 130 mm
- Specify on ordering: width x height in mm (Overall dimensions)

**Fixing**


- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

**Opties**

- Water channel
- Drainage profile
- Removable mesh
- filter

**Typical applications**

- Window Louvre with no look-through and stick-proof

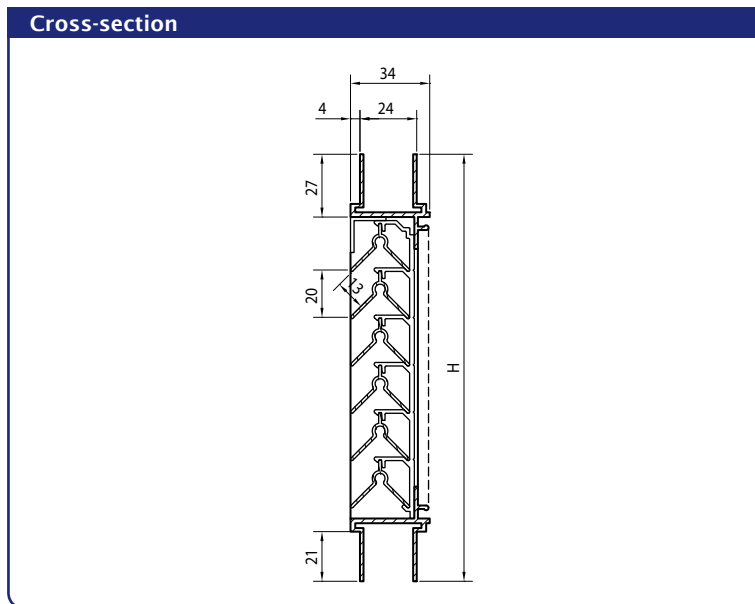

Technical specifications	
	<b>415</b>
Airflow	(EN 13030)
K-factor (supply)	33,80
K-factor (discharge)	33,80
C <sub>e</sub> coefficient	0,172
C <sub>d</sub> coefficient	0,172
Technical data	
Visual free area	93 %
Physical free area	39 %
IP class	IP2XD

