

*Round louvre with chevron section blade*

**Material**



- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (6 x 6 mm) or insect screen (2.3 x 2.3 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)
- Frame assembled by a single weld

**Dimensions**

- Blade pitch: 20 mm
- Frame thickness: 24 mm
- Minimum diameter: 340 mm
- Maximum diameter:
  - 1400 mm if anodised in satin colour
  - 1500 mm if powder-coated in RAL or Syntha Pulvin colour
  - over 1500 mm: in two parts

**Fixing**

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

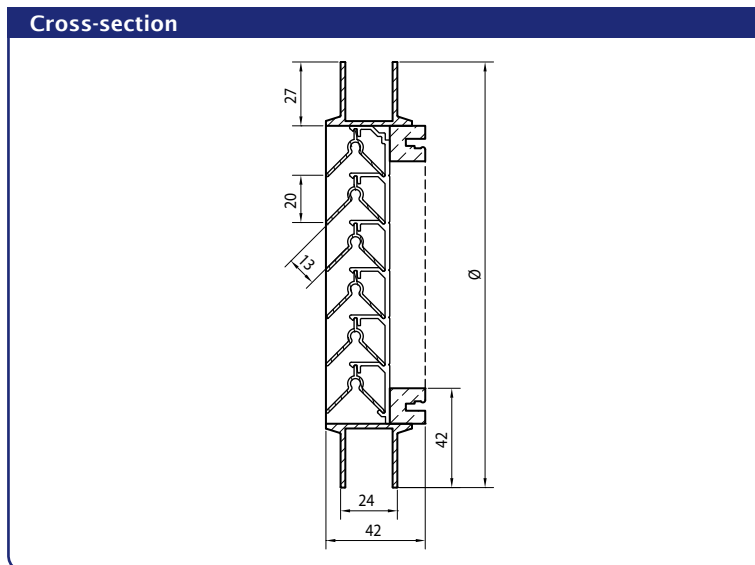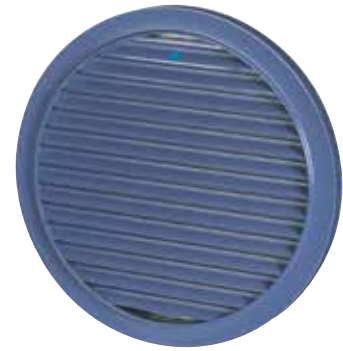

Technical specifications	
	<b>415R</b>
<b>Airflow</b>	(EN 13030)
K-factor (supply)	33,80
K-factor (discharge)	33,80
C <sub>e</sub> coefficient	0,172
C <sub>d</sub> coefficient	0,172
Technical data	
Visual free area	93 %
Physical free area	39 %
IP class	IP2XD