

*Surface-mounted, glazed-in louvre with frame*

**Material**

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 insect screen (2.3 x 2.3 mm) or mesh (6 x 6 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

**Dimensions**


- Blade pitch: 33 mm
- Thickness: 40 mm
- Minimum dimensions: 136 x 136 mm
- Maximum dimensions: 1500 x 1500 mm

**Fixing**

- Screws and plugs are included

**Typical applications**

- Removable louvre

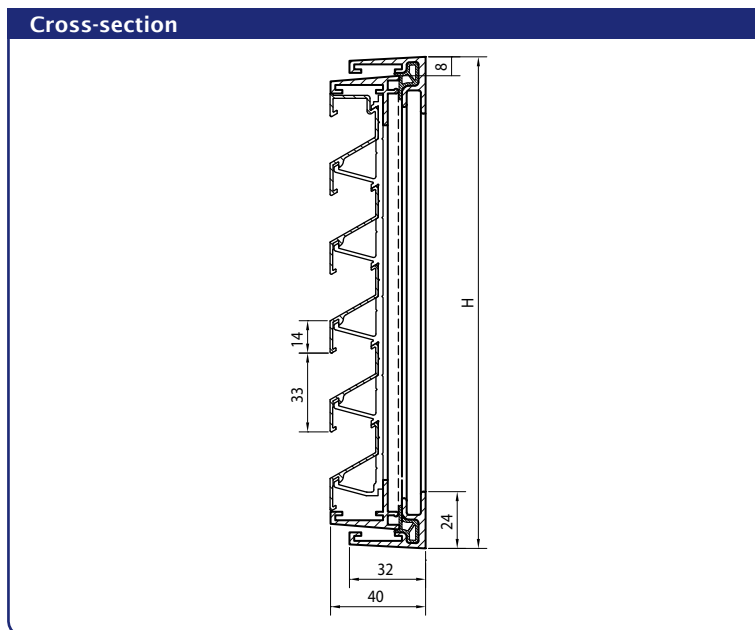

Technical specifications	
	<b>432</b>
<b>Airflow</b>	(EN 13030)
K-factor (supply)	23,56
K-factor (discharge)	25,51
C <sub>e</sub> coefficient	0,206
C <sub>d</sub> coefficient	0,198
Technical data	
Visual free area	59 %
Physical free area	45 %

