

484 < Glazed-in louvres



Glazed-in louvre, heavy-duty series, pitch 50

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 insect screen (2.3 x 2.3 mm) or mesh (6 x 6 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions

- Blade pitch: 50 mm
- Frame thickness: 24 or 28 mm
- Specify on ordering: full width x height in mm
- Minimum dimensions: 220 x 220 mm


Fixing

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

Options

- Water channel
- Removable mesh
- Filter
- Controllable type 484/VA – same build as type 414/VA

Cross-section

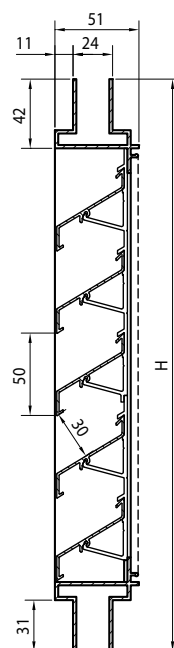

Technical specifications

	484
Airflow	(EN 13030)
K-factor (supply)	8,75
K-factor (discharge)	8,45
C _e coefficient	0,338
C _d coefficient	0,344
Technical data	
Visual free area	70 %
Physical free area	60 %
IP class (louvre with mesh; electrical installation at least 100mm from louvre)	IP2XD